




100/3M

**Single phase-2poles-3000RPM-50HZ
230 Voltage**

Mechanical Features			Electric Features	
General			General	
Working moment	1.96	kg.cm	Nominal voltage	230V
Unbalance	0.98	kg.cm	Input power	0.1KW
Force	98	kg	Current A max	0.54A
Bearing			Power factor	0.76
TYPE(C&U)	6202		La/in	3.2
	100%	10818	Certification	
Life(h)	80%	21382	ETL CLASS II DIV.II	T4
	50%	88369	GROUP F G TENV NEMA 4	
Bearing Grease			ATEX II 3D Ex tD A22	T100°
Lube Schedule			IP66	
Lube replacement			Amb Temp. (-20°~+40°)	
Grease Type				

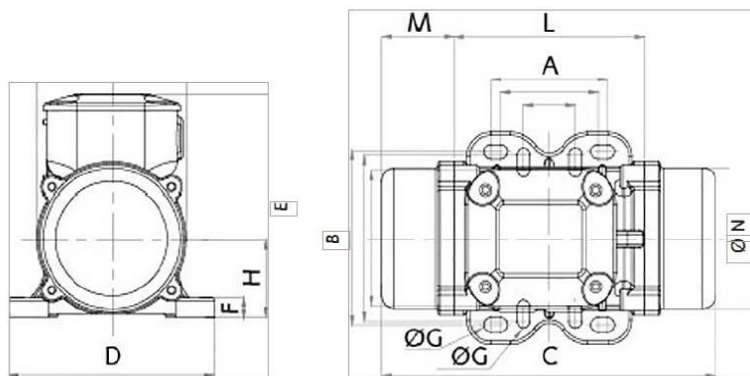

A	62-74
B	106
C	221
M	50
G	9
Holes	4
D	130
E	136
F	12
H	48
I	94
L	121
N	86

Clamping torque(Nm) 23

weight	Screw	washer	Cable type	Cable Glande
5.1	M8	8.4X16	3GX1.5	M16X1.5